

TRI

Belt conveyor for hand sorting

Composed of a fabricated profile section chassis, the **TRI conveyor is used for intensive industrial conveying.**

Its clean, compact, stiff and flexible design endows it with great reliability and optimizes maintenance costs. Manufactured in our Sedan works.

Its ergonomics have been designed to meet legal requirements in terms of **personal safety, maintenance and service ability**, in compliance with current technical standards, in particular the **Machinery Directive 2006/42/EC**.

Common fields of use




Dry products



Wet products



Fine products



Products $\leq 1\,300\text{ kg/m}^3$



Recycling plants



Household waste



Industrial waste




Building/
Public Works



WEEE




ASR



Compost



Clinker

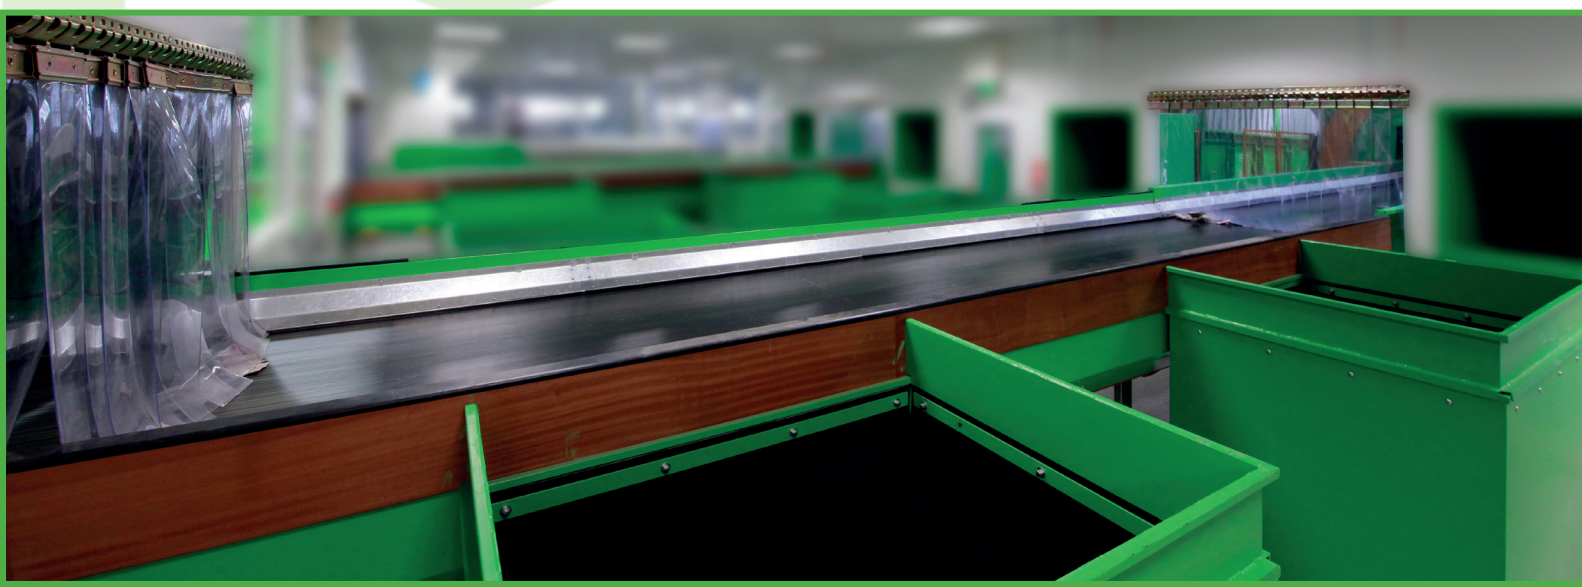

Usual fonctions




Conveyor for
sorting in
booths


Main characteristics

Standard belt widths	Length	Linear speed	Belt conveyor
600 - 800 - 1 000 - 1 200 - 1 400 mm	≤ 40 m maxi	≤ 1,00 m.s ⁻¹	Rubber band Smooth

Pre-equipment for options

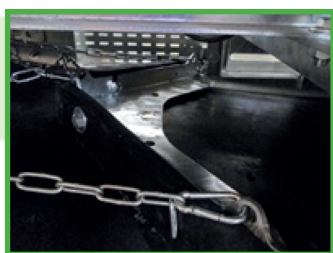

Stone catcher

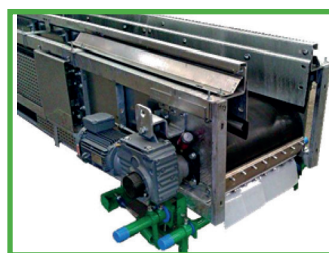

Belt scraper

Cleaning / Automatic detergent disinfection, bactericidal, fungicidal and virucidal
detergents • Sorting separator

Advantages



Very reliable
industrial
equipment



Robust
design



Optimized
maintenance



Low energy
motor



High quality
components



Ergonomic
according
to the NF
X35-702
standard